SYSTEM CONFIGURATION

OP OPTION

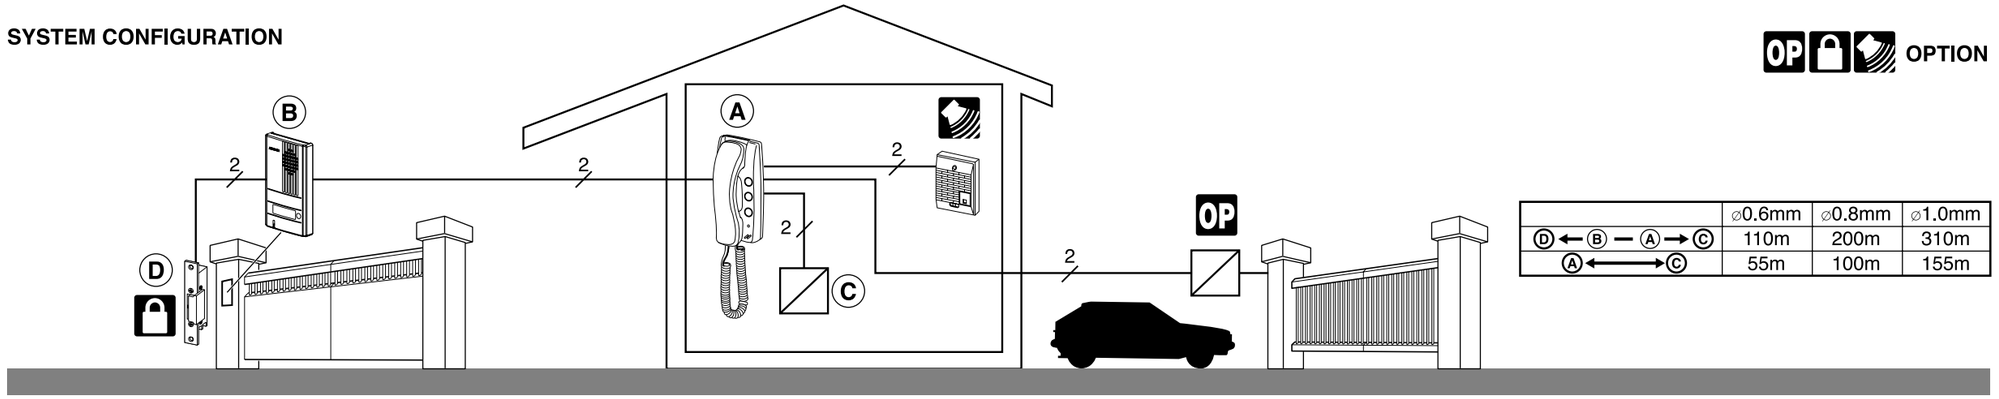

	⌀0.6mm	⌀0.8mm	⌀1.0mm
D ← B — A → C	110m	200m	310m
A ↔ C	55m	100m	155m

PACKAGE CONTENTS

- DA-1MD
- DA-1DG or DA-1DS
- Power supply: PT-1211C, PT-1211D, PT-1211DR or without
- Packet of wood screws
  (for mounting DA-1MD on wall)
- INSTALLATION & OPERATION MANUAL

(B) DA-1DG, DA-1DS

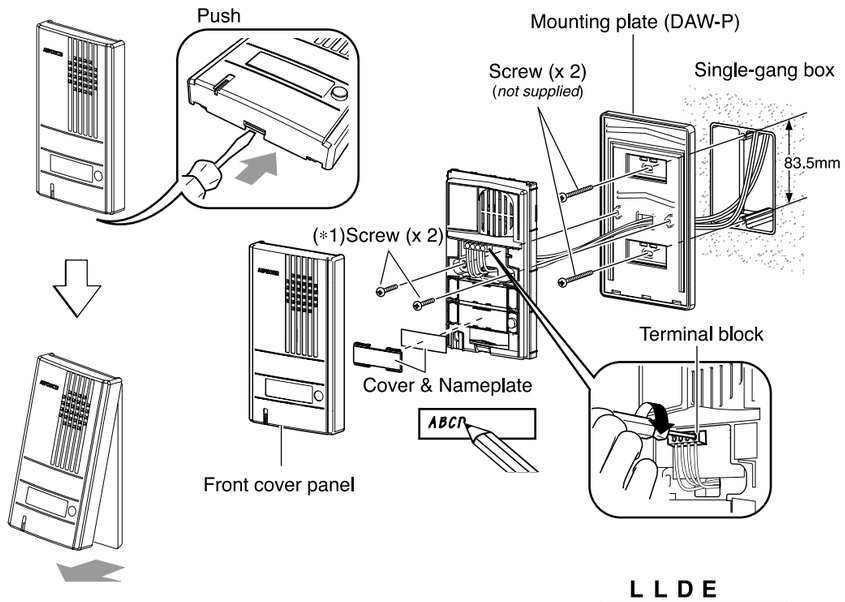

(A) DA-1MD

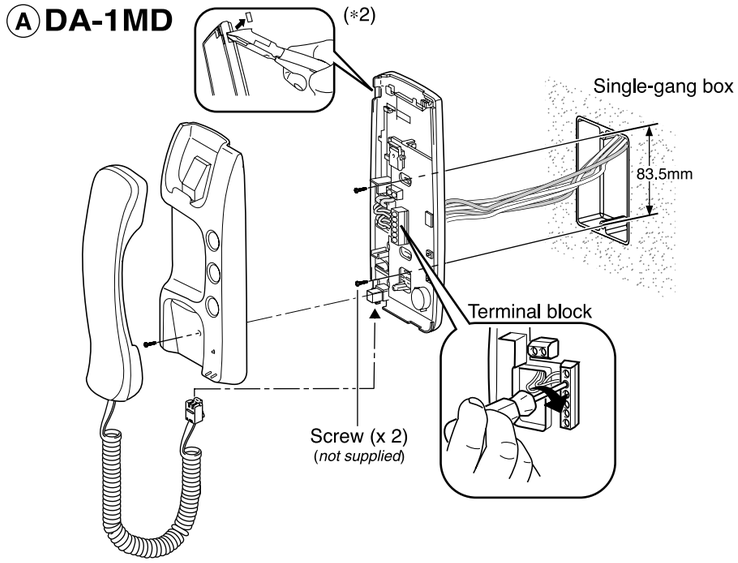

Power supply

(C) PT-1211DR



PT-1211DR Mounting on wall directly

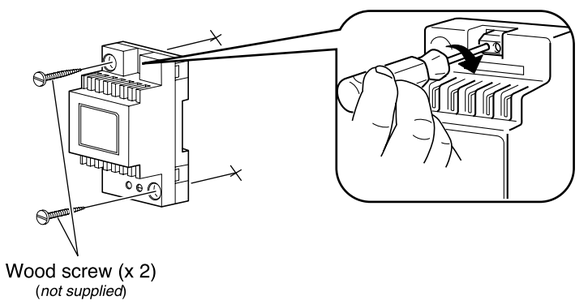

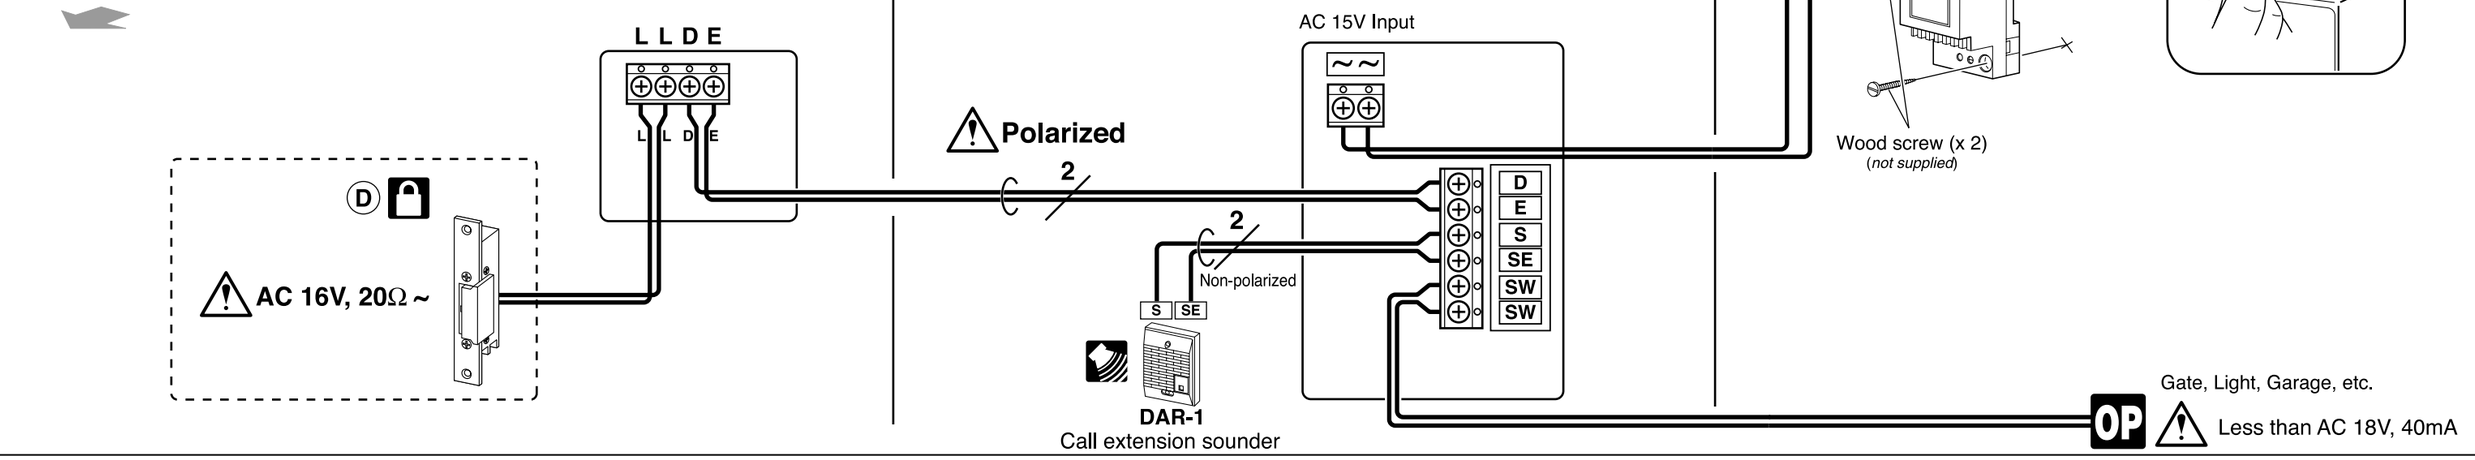

Door release:
EL-9S or others
(AC 16V, more than 20Ω)

DA-1DG, DA-1DS:
L, L: for door release
D, E: for DA-1MD
(∗1) Screw (x 2)
supplied with DAW-P

DA-1MD:
D, E: for door station
S, SE: for call extension sounder
SW, SW: Dry-closure contact
(18V, 40mA) for user-optional function
(∗2) Cut out a hole for surface cable run.

Power supply:
- Be sure to locate power supply in an electrical enclosure, and connect to a breaker with a contact separation of at least 3mm in each pole (Less than 16A).

DOOR STATION MOUNTING PLATE

DAW-P

INSTALLATION INSTRUCTIONS

This mounting plate is for mounting the DA-1, 2, and 4DS or DG on to a single-gang box.

■ MOUNTING

To open, push to unlock the Front cover, and remove as shown.

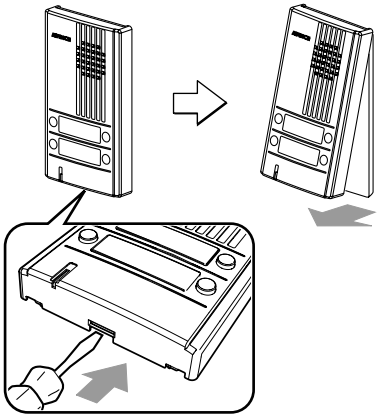

■ Package content

- Mounting plate DAW-P
- Packet of screws
- INSTALLATION INSTRUCTIONS

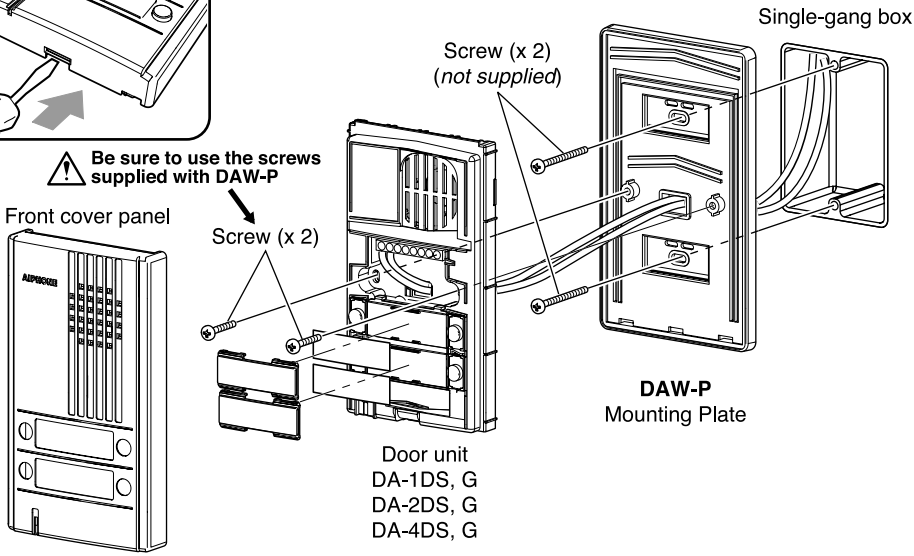

1. Attach mounting plate (DAW-P) to single-gang box.
2. Mount door unit (DA-1, 2, 4DS or DG) on mounting plate.
3. Re-mount front cover panel on door unit.

AIPHONE CO., LTD., NAGOYA, JAPAN
AIPHONE CORPORATION, BELLEVUE, WA, USA
AIPHONE EUROPE N.V., ANTWERP, BELGIUM

AIPHONE®
Providing Peace of Mind
http://www.aiphone.com/
Printed in Thailand

NAMES & FUNCTIONS

DA-1MD

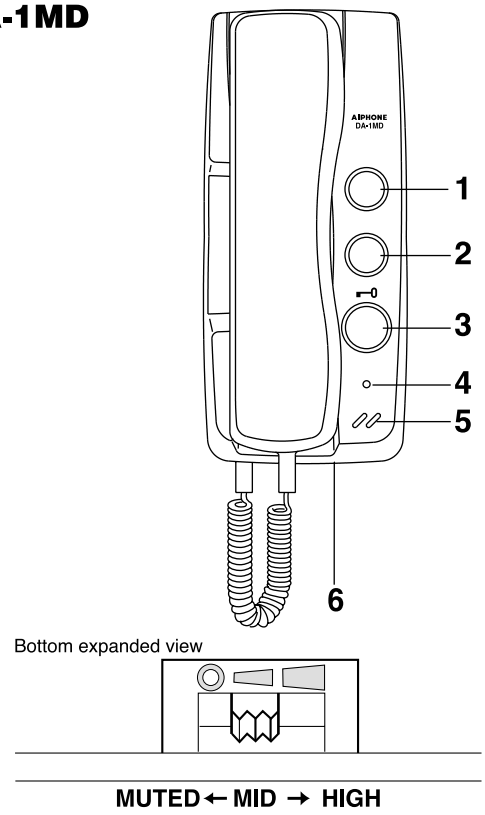

1 Unused
2 SERVICE button (option)
3 DOOR RELEASE button
4 Call tone off LED
Stays lit when the volume control is in MUTED position.
5 Call tone sounder
6 Call tone volume control

OPERATIONS

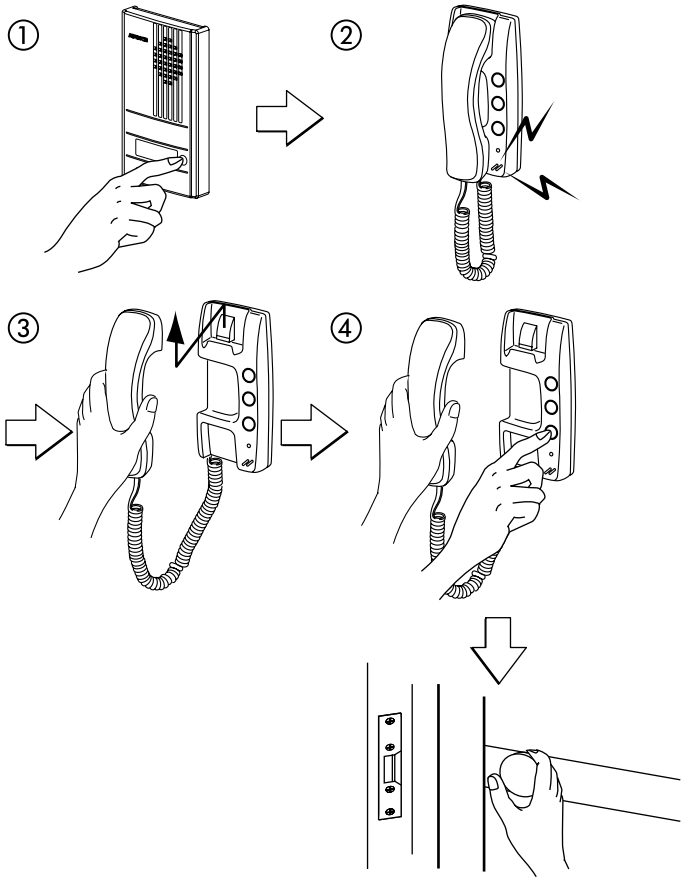

① Depress and hold down to call
② Call tone rings
③ Lift handset and communicate
④ Depress and hold down to activate door release

TECHNICAL PRECAUTIONS

Ambient temperature:
DA-1MD: 0°C ~ +40°C (+32°F ~ +104°F)

Asking for repairs:
If your DA system does not operate properly, ask qualified technician to repair it.

Cleaning:
Clean the unit with a soft cloth dampened with neutral household cleanser. Never use any abrasive cleaner or cloth.

SPECIFICATIONS

Power source:
AC 15V, supplied from power supply

Dimensions & weight:
200H x 89W x 63D(mm). 350g approx.
7-7/8"H x 3-1/2"W x 2-1/2"D. 0.77 lbs.