


CREATION 70

gerflor.com

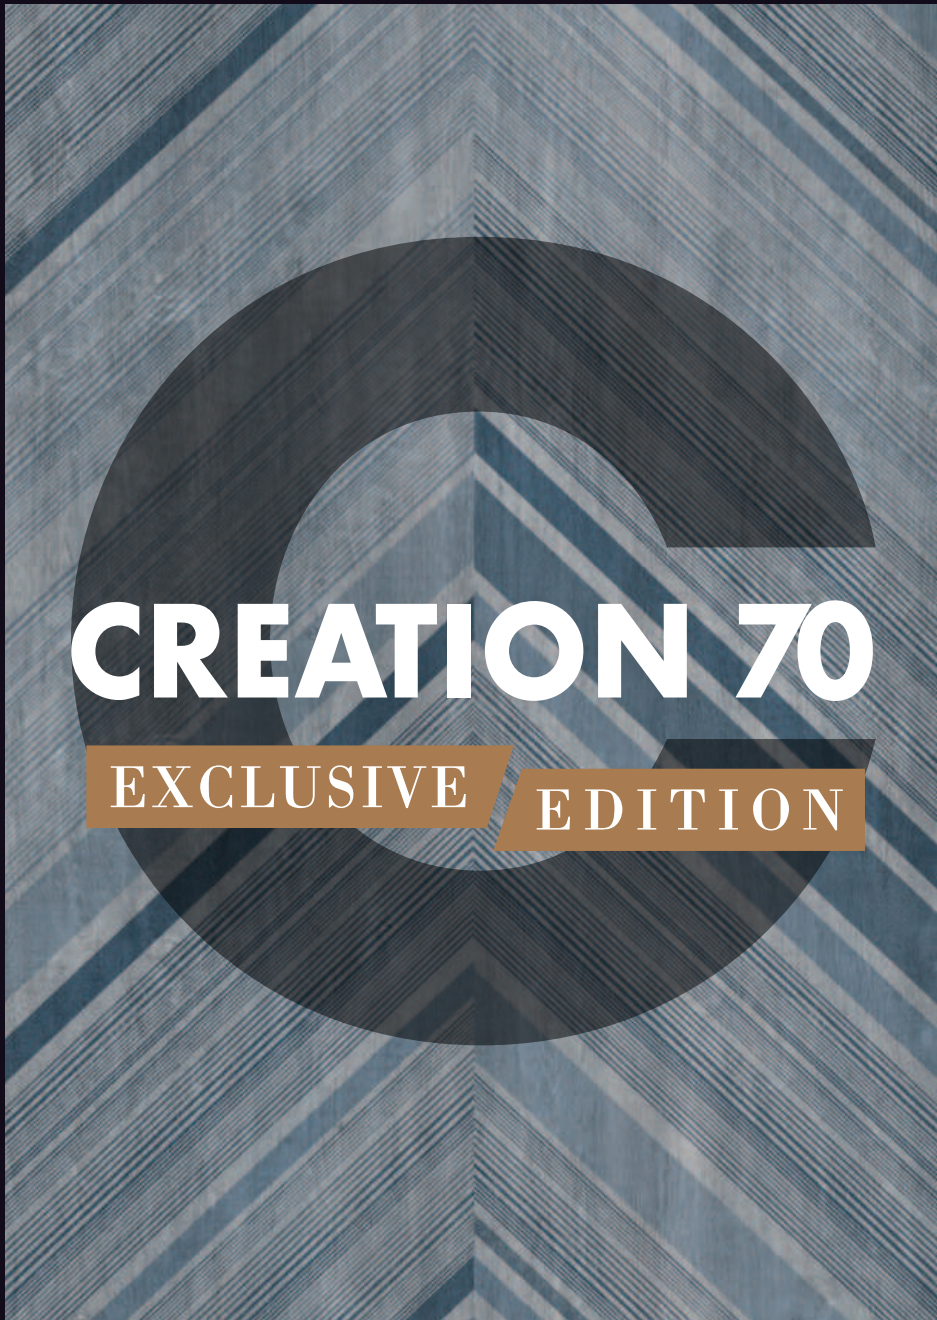

CREATION 70

EXCLUSIVE

EDITION

Gerflor[®]
theflooringgroup

CREATION 70

EXCLUSIVE EDITION



PERMANENT ADHESIVE
INSTALLATION*



**Wear layer (mm) / Couche
d'usure (mm) / Nutzschicht (mm)

DESIGN SHADE
VARIATION



Light



Medium









High

INTERIOR
DESIGNER

Visualize the designs
in a room setting using
Gerflor Interior Designer.




interiordesigner.gerflor.com

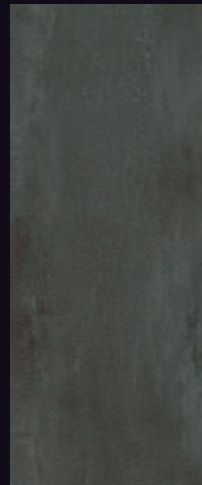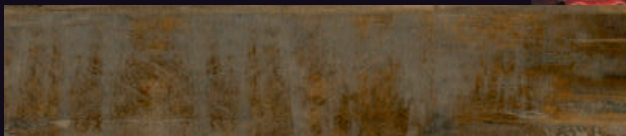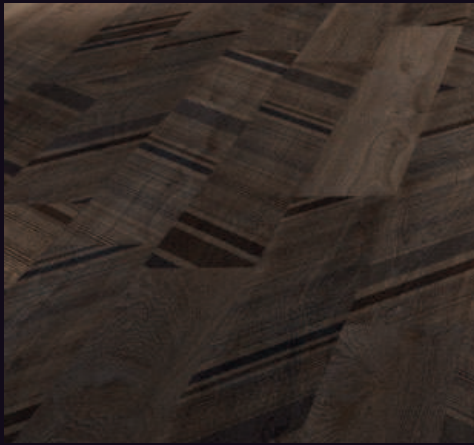






OXYD PURE

Installation	Format/cm	Code
	45.7x91.4	0088



OXYD IRON

Installation	Format/cm	Code
	45.7x91.4	0089



DESIGN SHADE VARIATION:



Light



Medium



High


CREATION 70

EXCLUSIVE EDITION



REGIMENTAL NAVY BLUE




Installation	Format/cm	Code
	18.4x121.9	0805



SOLID GLAM NAVY BLUE



Installation	Format/cm	Code
	18.4x121.9	0801



Light




Medium



High

PACKAGING	Format (cm)	Planks files / box	m ² / box
REGIMENTAL	18.4x121.9	14 pcs	3,14 m ²
SOLID GLAM	18.4x121.9	15 pcs	3,37 m ²



0805 REGIMENTAL NAVY BLUE



0805 REGIMENTAL NAVY BLUE /
0801 SOLID GLAM NAVY BLUE

CREATION 70

EXCLUSIVE EDITION




REGIMENTAL PICADILLY

Installation Format/cm Code



18.4x121.9 0807

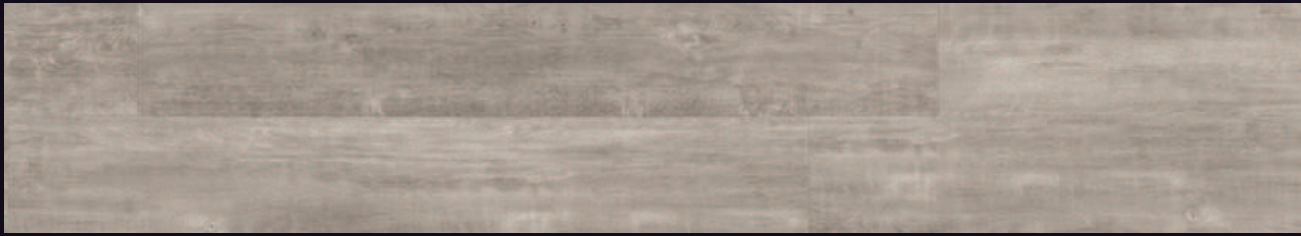

SOLID GLAM PICADILLY

Installation Format/cm Code



18.4x121.9 0803



REGIMENTAL SHERWOOD

Installation Format/cm Code



18.4x121.9 0808



SOLID GLAM SHERWOOD

Installation Format/cm Code



18.4x121.9 0804



Light




Medium




High

PACKAGING	Format (cm)	Planks tiles / box	m ² / box
REGIMENTAL	18.4x121.9	14 pcs	3,14 m ²
SOLID GLAM	18.4x121.9	15 pcs	3,37 m ²

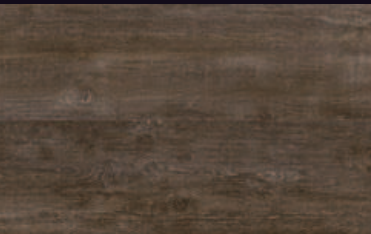

CREATION 70

EXCLUSIVE EDITION

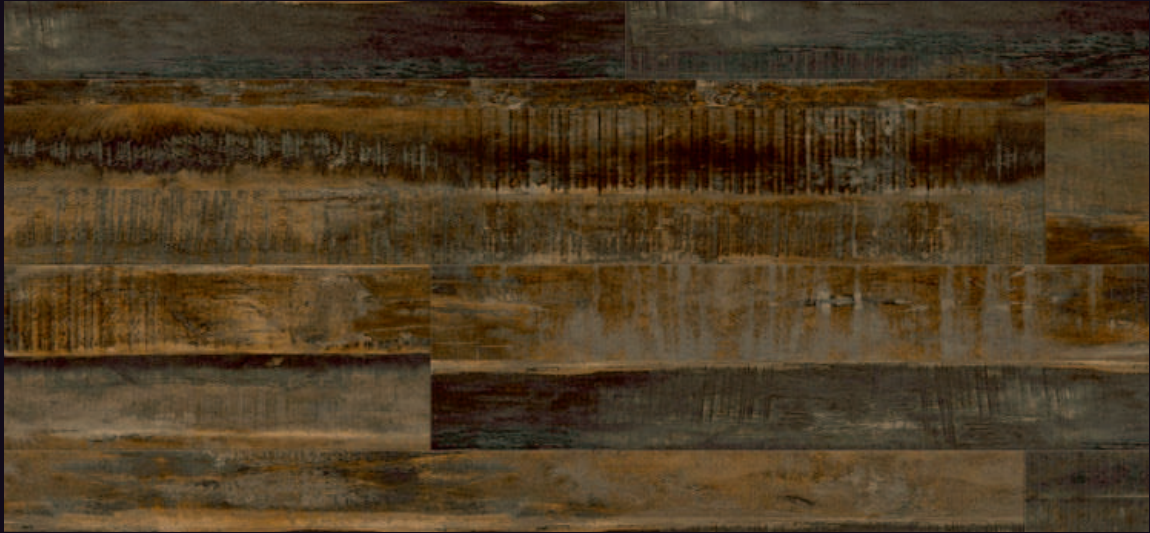


TOASTED WOOD CAFE

Installation	Format/cm	Code	
	23 x 150	0799	



TOASTED WOOD ROADSTER

Installation	Format/cm	Code	
	23 x 150	0800	



Light



Medium



High



CREATION 70

EXCLUSIVE EDITION



CERVINO OAK NATURE

Installation	Format/cm	Code	
	23 x 150	0798	



CERVINO OAK BEIGE

Installation	Format/cm	Code	
	23 x 150	0797	



Light



Medium



High




DECOR SKIRTING

To be installed with clip (5935) or mastic adhesive.

PACKAGING

5934: 5 x 2.4 lm / box

5935: 30 clip / box



SKIRTING

100% Matching

COLOR CODE		SKIRTING
0797	CERVINO OAK BEIGE	0797
0798	CERVINO OAK NATURE	0798
0088	OXYD PURE	0088
0089	OXYD IRON	0089
0805	REGIMENTAL NAVY BLUE	0801
0807	REGIMENTAL PICADILLY	0803
0808	REGIMENTAL SHERWOOD	0804
0801	SOLID GLAM NAVY BLUE	0801
0803	SOLID GLAM PICADILLY	0803
0804	SOLID GLAM SHERWOOD	0804
0799	TOASTED WOOD CAFE	0799
0800	TOASTED WOOD ROADSTER	0800

DESCRIPTION / BESCHREIBUNG / BESCHRIJVING / DESCRIPTION / DESCRIPCIÓN / DESCRIÇÃO / DESCRIZIONE / BESKRIVNING / BESKRIVELSE

Total Thickness / Gesamtdicke / Totale dikte / Épaisseur totale / Espesor total / Espessura total / Spessore totale / Total tjocklek / Total tykkelse	EN ISO 24346 (EN 428)	mm	2.50
	ASTM F386-02	inch	0.1
Thickness of the wearlayer / Dicke der Nuttschicht / Dikte van de slijtlaag / Épaisseur couche d'usure / Espesor capa de uso / Espessura camada de desgaste / Spessore strato di usura / Sliitskikt tjocklek / Tykkelse sliitesjikt	EN ISO 24340 (EN 429)	mm	0.70
	ASTM F410-02	inch	0.03
Weight / Flächengewicht / Gewicht / Poids / Peso / Peso / Vikt / Vekt	EN ISO 23997 (EN 430)	g/m ²	4100
Size / Format / Afmetingen / Format / Dimensiones / Dimensões / Dimensione / Storlek / Størrelse	ISO 24342 (EN 427)	mm	457x914 / 457x457 / 610x610 / 305x610 / 184x1371 / 184x1219 / 152x914 / 228x914 / 230x1500 Mix : 152x914-228x914-76x914
	ASTM F 536	inch	18"x36" / 18"x18" / 24"x24" / 12"x24" / 7,25"x54" / 7,25"x48" / 6"x36" / 9"x36" Mix : 6"x36"-9"x36"-3"x36"

CLASSIFICATION / KLASSIFIKATION / CLASSIFICATIE / CLASSIFICATION / CLASIFICACIONES / CLASSIFICAÇÕES / CLASSIFICAZIONI / KLASSIFISERING /
KLASSIFISERING

Norm/Product Specification / Produktnorm / Technische eigenschappen / Norme/Spécification produit / Normas / Normas / Norma prodotto / Norm/Produktspecification / Norm	-	-	EN ISO 10582 (EN 649)
	ASTM F 1700-04	-	Class III Type B
European Classification / Europäische Klassifizierung / Europese classificatie / Classement européen / Clasificación europea / Classificação Europeia / Europea / Europaklass / Europaklasse	EN ISO 10874 (EN 685)	Class	34 - 43
	EN 13 501-1	Class	Bfl-s1
Fire Rating / Brandverhalten / Brand classificatie / Classement Feu / Fuego / Fogo / Reazione al fuoco / Brandklassificering / Brannklassifisering	ASTM E648-08	Class	1
	CAN/ULC S102.2	-	-
Static Electrical Propensity / Begehaufladung / Elektrische eigenschappen / Potentiel de charge / Comportamiento electrostático / Comportamento electrostático / Resistenza elettrica / Elektrisk oppladning / Elektrostatisk oppladning	EN 1815	kV	< 2
Slip Resistance Wet / Rutschhemmung / Anti-slip / Glissance humide / Deslizamiento húmedo / Escorregamento húmido / Scivolosità umida ⁽¹⁾ / Friktion / Friksjon, våt	DIN 51130 / BGR 181	Class	R9/R10/R11 ⁽²⁾

PERFORMANCES / TECHNISCHE EIGENSCHAFTEN / TESTRESULTAAT / PERFORMANCE / CUALIDADES TÉCNICAS / PERFORMANCES / CARATTERISTICHE
TECNICHE / TESTVÄRDEN / TESTVERDIER

Wear Resistance / Verschleißverhalten / Slijtvasheid / Résistance à l'usure / Abrasión / Abrasão / Resistenza all'abrasione / Slitagemotstånd / Sliitestykke	EN 660.2	mm ³	< 2.0
Wear Group / Verschleißgruppe / Groep slijtvasheid / Groupe d'abrasion / Grupo de abrasión / Grupo de abrasão / Gruppo di abrasione / Slitklass / Sliitasjegruppe	EN 652	group	T
Type Binder content / Bindemittelgehalt / Teneur en agent liant / Contenido en ligante / Conteúdo em ligante / Bindemedelsinnehåll / Bindemiddel innhold	ISO 10582	group	I
	ISO 10581	group	-
Room Impact / Raumschall / Looppgeluid / Sonorité à la marche / Rumore al calpestio / Sonoridad en la pisada / Sonoridade ao andar / Trumljud / Romlyd	NF S 31074	dB	76
Impact sound insulation / Trittschallverbesserungsmaß / Geluidsisolatie / Isolation acoustique bruits de chocs / Acústica / Isolamento acústico / Stegljudsdämpning / Trinnylidsdemping	EN ISO 717-2	dB	4
Dimensional Stability / Maßstabilität / Maatvastheid / Stabilité dimensionnelle / Estabilidad dimensional / Estabilidade dimensional / Stabilità dimensionale / Dimensionsstabilitet / Dimensjonsstabilitet	EN ISO 23999 (EN 434)	%	≤ 0.15
Residual Indentation / Resteindruck / Indrukbelasting / Poinçonnement statique rémanent / Punzonamiento / Punçoamento / Imprinta / Intrycksbeständighet / Intrykksfasthet	EN ISO 24343-1 (EN 433)	mm	≤ 0.10
Castor chair test / Stuhllrollenbeanspruchung / Rolweerstand bureaustoelen / Essai de la chaise à roulettes / Determinación del efecto de una silla con ruedas / Resistência a cadeiras de rodas / Resistenza al passaggio di sed / Tålighet mot rullande stolhjul / Rullende stolhjul (Type W)	ISO 4918 (EN 425)	-	OK
Thermal Conductivity / Wärmeleitfähigkeit / Thermische weerstand / Conductivité thermique / Conductividad térmica / Contutividade térmica / Resistenza termica / Värmeledningsmotstånd / Varmemotstand	EN ISO 10456 (EN12524)	W/(m.K)	0.25
Colour Fastness / Lichtechtheit / Lichtechtheid / Solidité lumière / Resistencia a la luz / Estabilidade das cores / Solidità alla luce / Färgbeständighet / Färgbeständighet	EN 20 105 - B02	degree	> 6
Surface Treatment / Oberflächenvergütung / Oppervlaktebehandling / Traitement de surface / Tratamiento de superficie / Tratamento de superficie / Trattamento di superficie / Ytbehandling / Overflatebehandling	-	-	PUR+
Chemical Products Resistance / Verhalten gegenüber Chemikalien / Chemische bestandigheid / Résistance aux produits chimiques / Resistencia a los productos químicos / Resistência aos produtos químicos / Resistenza ai prodotti chimici / Kemikaliebeständighet / Kjemikaliebestandighet	EN ISO 26987 (EN 423)	-	OK / Beständig gegenüber nicht färbenden alkoholhaltigen Handdesinfektionsmitteln, Haushaltschemikalien und verdünnen Säuren und Laugen bei kurzzeitiger Einwirkung

ENVIRONMENT/INDOOR AIR QUALITY / UMWELT/RAUMLUFTQUALITÄT / ENVIRONNEMENT/QUALITE DE L'AIR INTERIEUR / MEDIO AMBIENTE/CALIDAD
INTERIOR DEL AIRE INTERIOR / MEO AMBIENTE/QUALIDADE DO AR INTERIOR / INNHOMHUSLUFT / EMISJONER

TVOC after 28 days / TVOC (28 Tage) / TVOC (28 dagen) / TVOC après 28 jours / TVOC (28 dias) / TVOC (28 dias) / TVOC (28 giorni) / TVOC (28 dagar) / TVOC (28 dager)	ISO 16000-6	µg/m ³	< 100
---	-------------	-------------------	-------

CE MARKING / CE KENNZEICHNUNG / EG CONFORMITEITSMERK / MARQUAGE CE / MARCA DE CONFORMIDAD CE / MARCA DE CONFORMIDADE CE /
MARCATURA CE DI CONFORMITA / CE-MÄRKNING / CE MARKING

	EN 14041	-	   
--	----------	---	--

(1) Ramp test with oil / Schiefe Ebene / Plan incliné avec huile
(2) Glissance humide / Slip resistance wet / Rutschhemmung : details sur site gerflor.com / details on website gerflor.com / Einzelheiten auf der web-site gerflor.com

PACKAGING / CONDITIONNEMENT / VERPACKUNGSEINHEITEN

	Format (cm)	Planks tiles / box	m ² / box	Weight / box (kg)	Box / pallet	m ² / pallet	Gross weight of a pallet (kg)	Pallet size (cm)
	18.4x121.9	15 pcs	3,37 m ²	15,35 Kgs	75	252,75 m ²	1 145 Kgs	100x124x80
REGIMENTAL	18.4x121.9	14 pcs	3,14 m ²	13,88 Kgs	75	235,50 m ²	1 071 Kgs	100x124x73.5
	23x150	8 pcs	2,76 m ²	13,71 Kgs	72	198,72 m ²	1 002 Kgs	98x153x60
	45.7x91.4	8 pcs	3,34 m ²	14,73 Kgs	64	213,76 m ²	973 Kgs	95x95x98



TVOC < 100µg/m³
after 28 days

LESS SPEAKING, MORE ACTIONS



COMPOSITION

- 100% REACH compliant
- FREE of formaldehyde
- FREE of heavy metals
- FREE of solvent



INDOOR AIR QUALITY

- TVOC emissions 10 times better than norms requirements (TVOC < 100 µg/m³ after 28 days)
- Floorscore certified
- M1 certified
- Comply with AgBB protocol
- No formaldehyde emission



RECYCLED CONTENT

- 45% recycled content
- 100% REACH compliant recycled content



WELLNESS

- Walking noise reduction:
 - ▶ -10dB vs Laminate



RECYCLABILITY

- 100% recyclable product

FRANCE: Gerflor - Service Express:

N°Azur 0 810 569 569

PREV. APPEL LOCAL

N°Azur FAX 0 810 569 570

PREV. APPEL LOCAL

e-mail: contactfrance@gerflor.com

OTHER COUNTRIES: Gerflor International

Tel: +33 (0)4 74 05 40 00

Fax: +33 (0)4 74 05 03 13

e-mail: gerflorcontract@gerflor.com

gerflor.com

ARCHITECTURE
DECORATION
SPORT
TECHNOSPECIFIC

Gerflor Don't forget our complementary ranges!



Handrails



Wall Coverings
& Protections



Entrance mats



Skirtings
& Profiles

& be connected!



www.gerflor.com

#Gerflor

CREATION 70: LESS SPEAKING, MORE ACTIONS



REACH

COMPOSITION
100% REACH



INDOOR AIR QUALITY

10 times better than norms requirements
(TVOC < 100ug/m³ after 28 days)
No formaldehyde emission



**RECYCLED
CONTENT**

45%



RECYCLABILITY

100%



WELNESS

Walking noise reduction :
-10dB vs Laminate

Gerflor
theflooringroup