



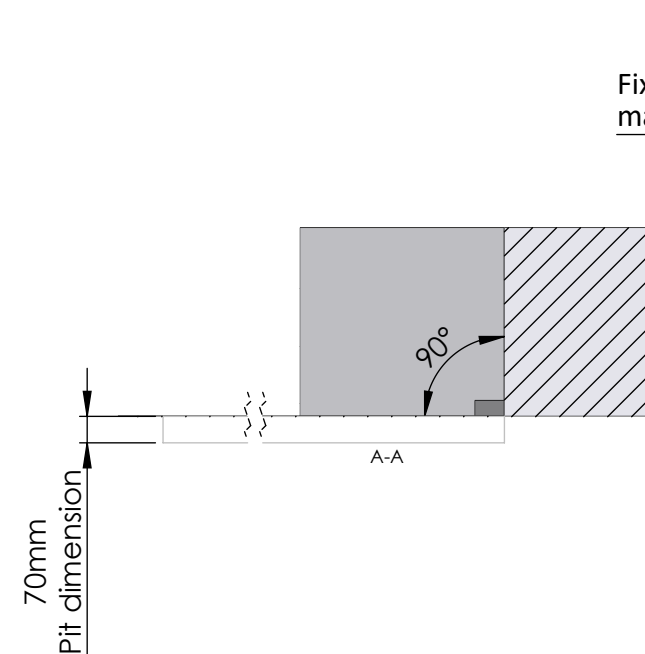

Fixing plane must be solid material for screws to guide rails


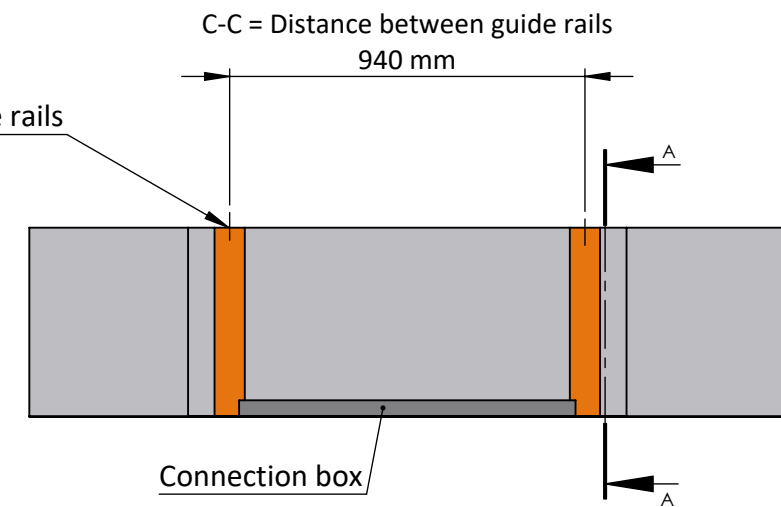


Surface must be plane and vertical

Connection box must be placed on the floor, between the guide rails.
Power supply connection must be in a distance of max. 1 m from the connection box

H = Height between upper and lower level.

Surface must be plane and horizontal: +/- 5mm

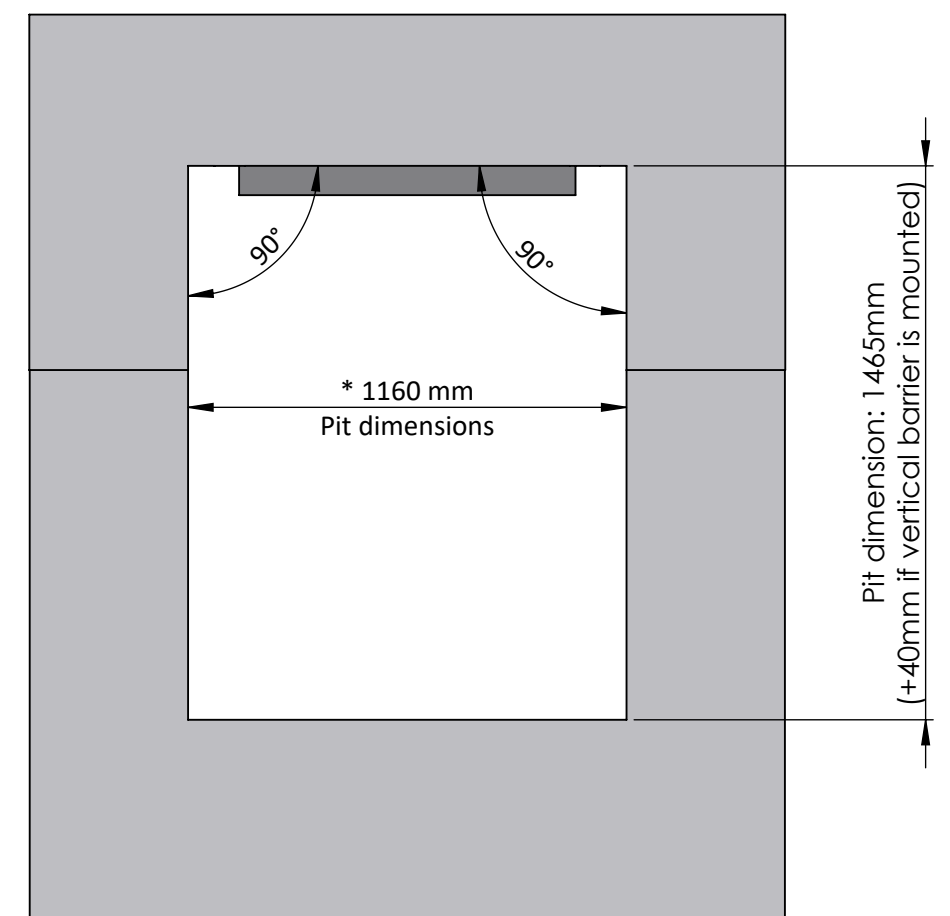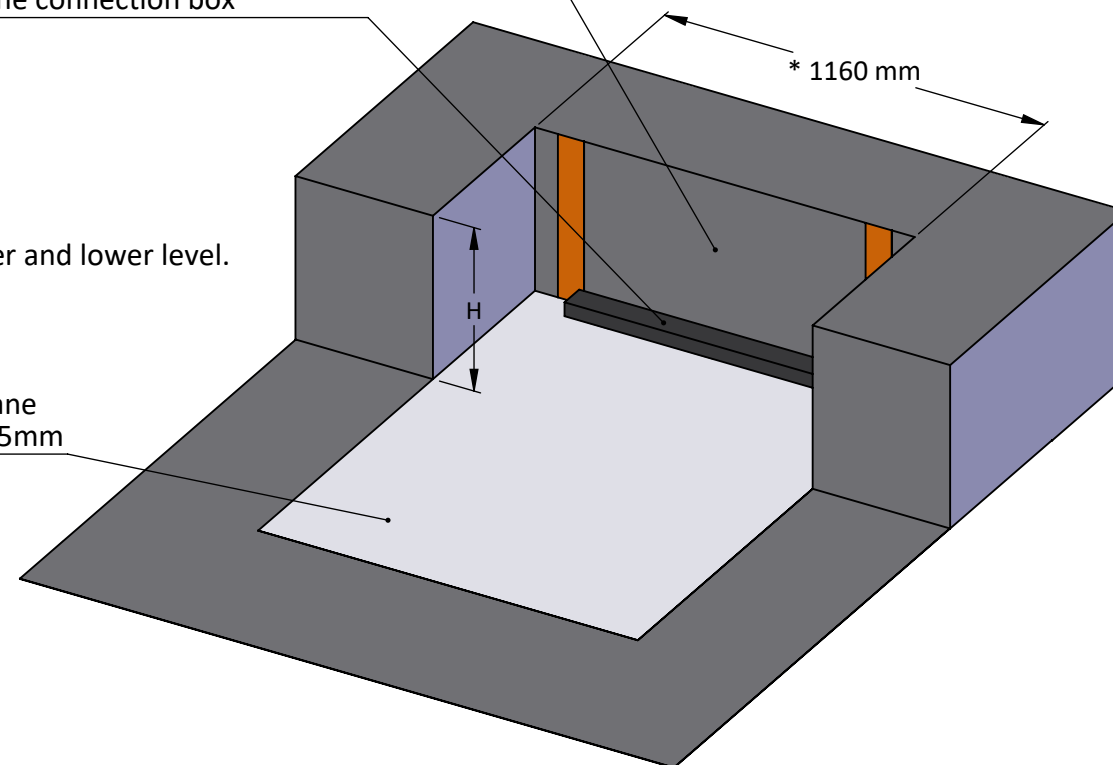

* Local building codes may apply

Alle rettigheder til emne tilhører Liftup

Rev.	Revision description.	EasyLift 900 V3 in building		LIFTUP	
G	-	Created date:	Last change date:	www.liftup.dk	
F	-	03-05-2016	23-07-2018	Tlf.: 9686 3020	
E	-	Materiale:	Tolerancer:	Sheet size	Item Number:
D	-	- mm -	-	A3	103179
C	-	Finish:	Weight:	Scale:	Version:
B	Bredde ændret til 1160 mm	-	-	1:20	B
				Drawn by:	GC