


NEOPERL® EPDM are highly flexible EPDM rubber hoses with stainless steel braiding. Excellent functional and mechanical properties. Certified in Denmark, Norway and Sweden for use in technical water supply systems (according to European Standard 'EN13618').

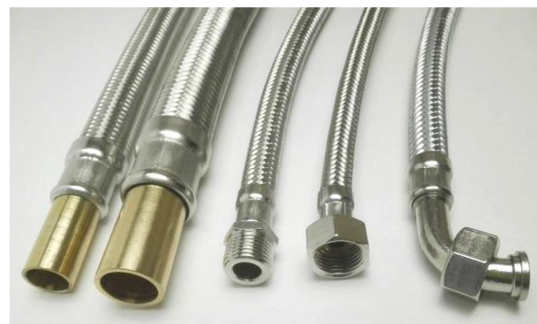

Technical specifications :

Article no.	S462	S562	S662	S762	S862
Nominal size	DN10	DN13	DN15	DN20	DN25
Inside diameter hose	Ø9,5	Ø13	Ø16	Ø19	Ø25
Outside diameter hose, without braiding	Ø13,5	Ø17	Ø22	Ø26	Ø34
Braiding	Stainless steel				
Max. work pressure	10 bar				
Max. temperature	90 °C				
Min. flow at 3 bar	45 l/min	60 l/min	96 l/min	145 l/min	-
Approvals	VA (DK) – RISE (S) – SINTEF (N)				

Standard fittings :

	Female elbow				Female				Tube				Male			Comp. joint	
	3/8"	1/2"	3/4"	1"	3/8"	1/2"	3/4"	1"	Ø12	Ø15	Ø22	Ø28	1/2"	3/4"	1"	Ø12	Ø15
DN10	x	x	x		x	x	x		x				x	x		x	
DN13		x	x			x	x			x			x	x			x
DN15			x				x			x				x			x
DN20			x				x				x			x			
DN25				x				x				x			x		

(Other fittings on request)

Applications* :



Dish washer



Washing machine



Toilet

*For other purposes, please contact Neoperl Nordic A/S