

Environmental Product Declaration



In accordance with ISO 14025, EN 15804+A1 and EN 16810 for:

ACCZENT and RUBY heterogeneous vinyl flooring - TARKETT

| | |
|--------------------------|---|
| Programme: | The International EPD® System www.environdec.com |
| Programme operator: | EPD International AB |
| EPD registration number: | S-P-01348 |
| Publication date: | 2018-12-06 |
| Validity date: | 2023-12-01 |
| Geographical scope: | Europe |



General information

Information about the organization

Owner of the EPD: Tarkett France. Axel ROY, +33 (0)141 204 074, axel.roy@tarkett.com, Tarkett La Défense, 1 Terrasse Bellini 92400 Paris

Description of the organisation: ISO 9001, ISO 14001, ISO 50001, WCM manufacturing site

Name and location of production sites: Sedan, France/Lenham, United Kingdom/ Clervaux, Luxembourg

About the company

With an international coverage and a wide range of products, Tarkett has over 130 years of experience in providing integrated solutions for floorings to professionals and end users.

Many of the most important architectural firms in the world and building professionals have chosen Tarkett for the value of its products and for its consultation and service abilities. Therefore, Tarkett floorings and sport surfaces are present in several prestigious architectural reference points. Tarkett offers integrated solutions for floorings, able to meet the particular needs of customers. Our wide range of designs, colors and models provides an infinite series of possibilities, contributing to create a positive environment and a better quality of life for people.

Tarkett operates with the utmost respect for the environment towards the realization of eco-friendly products.

Tarkett's commitment to the environment is woven throughout its business. Cradle-to-Cradle principles are, in fact, the basis of the design and production of every solution. Particularly, the lifecycle analysis is used to continuously improve the production process, and so the products until their use stage, disposal and recycling. The commitment to the environment is also proven by the accession to the Circular Economy 100 program, where Tarkett group, with a network of companies, is working to develop a circular economy model based on the reuse of materials and preservation of natural resources. The development of products that can be reused within internal production cycles, or external ones in case of other individuals, has been an integral part of the business strategy aimed at sustainability for many years. The WCM (World Class Manufacturing) management system has been developed in 2009, and it includes the environmental pillar aimed to the elimination of losses and to the growth of process efficiency.

Product information


Product name: Acczent Classic 40, Acczent Excellence 70 Topaz, Acczent Excellence 80, Acczent Unik, Ruby 70, Acczent Platinum 100

Product identification: Heterogeneous poly (vinyl chloride) compact flooring (ISO 10582)

Product description:

The products above are compact heterogeneous PVC floorings developed by Tarkett.

The following figure shows an example of Acczent flooring:

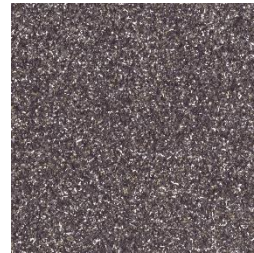

Acczent Platinum flooring

UN CPC code: APE/NAF - 2223Z

Geographical scope: Europe

Range of application

These products are classified in accordance with ISO 10582 to be installed in various areas of application, such as: healthcare, education, commercial, education.

LCA information

Functional unit / declared unit:

1m² of floor covering with a reference service life (RSL) of 1 year, for specified characteristics application and use areas according to ISO 10582 and EN ISO 10874

Reference service life:

1 year

Time representativeness:

2017

Database(s) and LCA software used:

SimaPro 8.5

Description of system boundaries:

Cradle to grave

System boundaries


The system boundary is based on the EN 15804 description.

Production stage : A1 – A3: includes the provision of all raw materials, transport to the production site and energy and water consumption during the manufacturing of the product, packaging of final product, the different air emissions, as well as processing of waste generated by the factory.

Construction stage: A4 – A5: includes the transport from the factory to the final customer, the installation of the product, as well as all consumables and energy required and processing of waste generated during the installation.

Use stage B1 – B7: includes provision and transport of all materials, products and services related to the use phase of the product, as well as their related energy and water consumption, and the processing of any resulting waste.

End of life stage C1 – C4: includes provision and transport of all materials, products and services related to the end of life phase of the product, including energy and water consumption, as well as the end of life processing of the product.

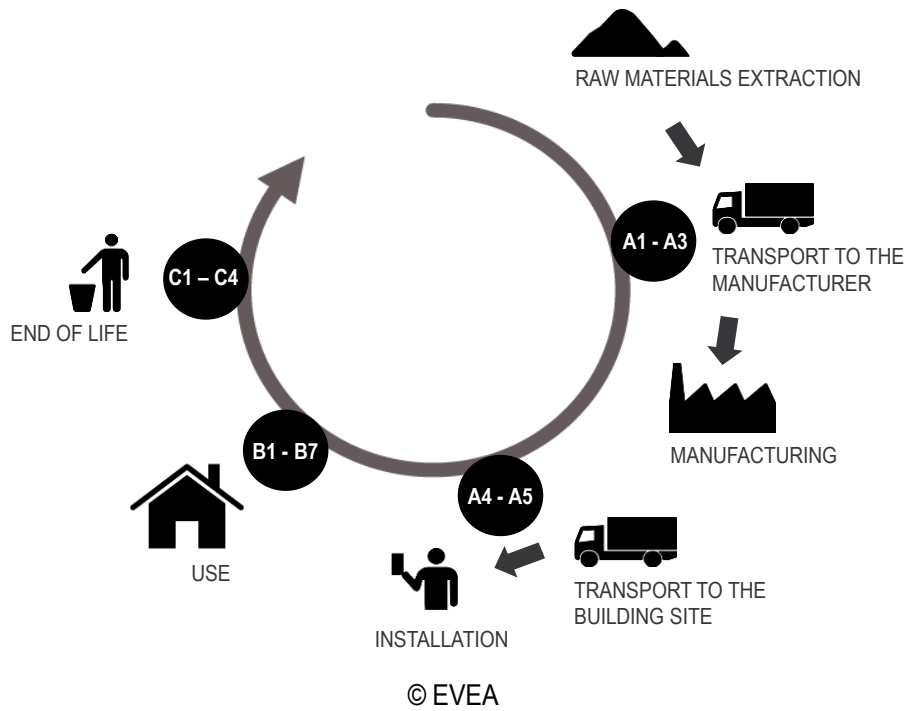

Included/excluded life stages

| | Production Stage | | | Construction Process Stage | | Use Stage | | | | | | | End-of-Life Stage | | | |
|----------------|---|---------------------------|---------------|----------------------------|----------------------------|-------------------|-------------|--------|-------------|---------------|------------------------|-----------------------|-----------------------------|------------------|---|----------|
| | Raw material supply (extraction, processing, transport to manufacturer) | Transport to manufacturer | Manufacturing | Transport to building site | Installation into building | Use / application | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | Deconstruction / demolition | Transport to EoL | Waste processing for reuse, recovery or recycling | Disposal |
| Modules | A1 | A2 | A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 |
| Accounted for: | X | X | X | X | X | MND | X | MND | MND | MND | MND | MND | X | X | X | X |

X Module included in the study
MND : Module not declared

Use stage: Floor coverings do not contribute to modules B1 and B3 to B7 according to the standard EN 16810.

Cut-off criteria

The cut-off criteria shall be 1% of renewable and non-renewable primary energy usage and 1% of the total mass of that unit process. The total neglected input flows per module shall be a maximum of 5% of energy usage and mass.

For this study, all input and output flows have been considered at 100%, including raw materials as per the product composition provided by the manufacturer and packaging of raw materials as well as the final product.

LCA data

As a general rule, specific data derived from specific production processes or average data derived from specific production processes have been used as the first choice as a basis for calculating an EPD. To model the life cycle of the product in question, the software SimaPro 8.5, developed by PRé, has been used in conjunction with the LCA database ecoinvent v3.4.

Data quality

The objective of this evaluation is to evaluate the environmental impacts generated by the product floor covering Acczent throughout its entire life cycle. To this end, ISO 14040, ISO 14044 and EN 15804 have been met regarding the quality of data on different following criteria:

The time factor, the life cycle inventory data used come from:

- Data collected specifically for this study on Tarkett sites. Data sets are based on 1 year averaged data.

- In the absence of collected data, generic data from the ecoinvent V3.4 cut-off by classification database. This is regularly updated and is representative of current processes

Technological Coverage

- Tarkett technologies used for the manufacture methods of the product.
- European technology in the case of use of generic data.

Geographical Coverage

- Data come from production sites of Tarkett
- The generic data come from the ecoinvent database, representative of the European processes.

Allocation

The overall values for material and energy consumptions for factories during a period of one year have been divided by the annual production of each product to supply a value per square meter of flooring produced. All factories data are measured in square meters, and it is assumed that the process consumptions are governed by area of flooring processed rather than mass.

Comparability

Basically, a comparison or an evaluation of EPD data is only possible if all the data sets to be compared were created according to /EN 15804/ and the building context, respectively the product-specific characteristics of performance, are taken into account.

Content declaration

Product

According to PCR 2012-01 v2.2, several similar products can be included in the same EPD if "differences between the mandatory impact indicators lower than $\pm 10\%$ (concerning A1-A3) could be presented using the impacts of a representative product". The next table presents how products are grouped :

| Products | Representative categories |
|-----------------------------|---|
| Acczent Classic 40 | Surface density < 2.8 kg/m ² |
| Acczent Excellence 70 Topaz | Surface density between 2.8 and 3.05 kg/m ² |
| Ruby 70 | |
| Acczent Excellence 80 | Surface density between 3.05 and 3.25 kg/m ² |
| Acczent Unik | |
| Acczent Platinum 100 | Surface density > than 3.25 kg/m ² |

| Products | Thickness (mm) | Mass (kg/m ²) | Recycled content (%) | Factories city |
|-----------------------------|----------------|---------------------------|----------------------|-------------------------|
| Acczent Classic 40 | 2.00E+00 | 2.15E+00 | 19 | Clervaux (Luxembourg) |
| Acczent Platinum 100 | 2.45E+00 | 3.25E+00 | 60 | Lenham (United Kingdom) |
| Ruby 70 | 2.00E+00 | 3.00E+00 | 31 | Clervaux (Luxembourg) |
| Acczent Excellence 70 Topaz | 2.50E+00 | 2.90E+00 | 15 | Clervaux (Luxembourg) |
| Acczent Excellence 80 | 2.00E+00 | 3.10E+00 | 20 | Sedan (France) |
| Acczent Unik | 2.10E+00 | 3.14E+00 | 22 | Sedan (France) |


Chemical composition for all representative products are presented in the following table:

| Chemical substances for each representative product | Surface density < 2.8 kg/m ² | Surface density between 2.8 and 3.05 kg/m ² | Surface density between 3.05 and 3.25 kg/m ² | Surface density > than 3.25 kg/m ² | Substance concerned with REACH |
|---|---|--|---|---|--------------------------------|
| Non Recycled PVC (kg/m ²) | 6,15E-01 | 9,08E-01 | 7,89E-01 | 8,00E-03 | / |
| Recycled PVC (kg/m ²) | 4,14E-01 | 6,33E-01 | 1,02E+00 | 1,94E+00 | / |
| DINCH (kg/m ²) | 1,85E-01 | 2,59E-01 | 2,18E-01 | 3,60E-01 | / |
| Benzoic acid (kg/m ²) | 9,15E-02 | 9,59E-02 | 1,08E-01 | 0,00E+00 | / |
| DOA (kg/m ²) | 7,10E-02 | 6,69E-02 | 0,00E+00 | 0,00E+00 | / |
| Dibutyl ester (kg/m ²) | 2,85E-02 | 4,08E-02 | 4,68E-02 | 1,95E-01 | / |
| Citrate (kg/m ²) | 0,00E+00 | 0,00E+00 | 0,00E+00 | 7,00E-02 | / |
| Adipate (kg/m ²) | 0,00E+00 | 0,00E+00 | 0,00E+00 | 6,50E-02 | / |
| Epoxidised soya bean oil (kg/m ²) | 5,20E-03 | 9,85E-03 | 2,12E-02 | 3,04E-02 | / |
| Stabilizers (kg/m ²) | 4,80E-03 | 8,95E-03 | 1,88E-02 | 1,00E-02 | / |
| Mineral fillers (kg/m ²) | 6,85E-01 | 8,29E-01 | 7,96E-01 | 2,15E-01 | / |
| Additives (kg/m ²) | 2,55E-02 | 2,81E-02 | 1,82E-04 | 1,00E-03 | / |
| Titanium dioxide (kg/m ²) | 9,90E-03 | 1,12E-02 | 1,80E-02 | 1,10E-02 | / |
| Pigments (kg/m ²) | 6,60E-03 | 7,44E-03 | 2,20E-02 | 6,00E-03 | / |
| Polyurethane (kg/m ²) | 0,00E+00 | 0,00E+00 | 2,95E-02 | 1,60E-02 | / |
| Glass fibre (kg/m ²) | 4,00E-02 | 4,00E-02 | 7,28E-04 | 0,00E+00 | / |

Product manufacturing

Production process

The production of the heterogeneous flooring is presented in the following figure:

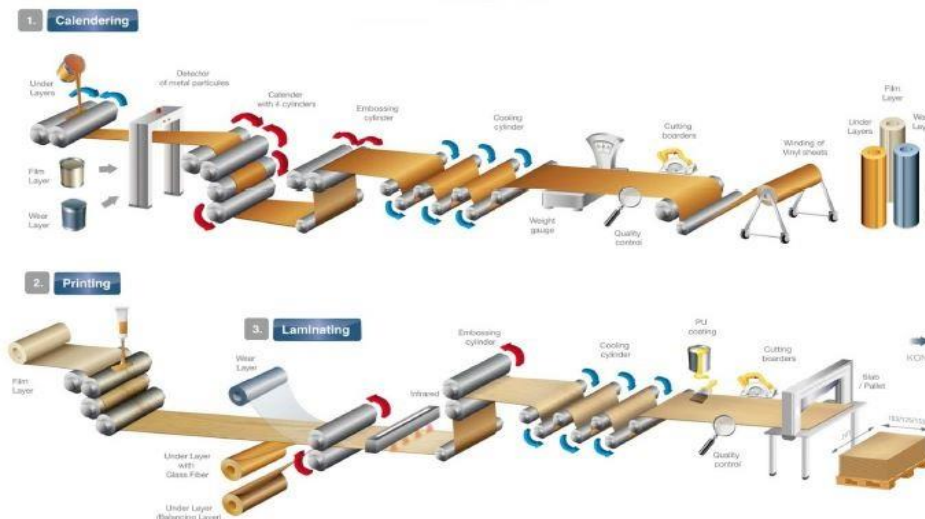

Production waste

| Waste type | Surface density < 2.8 kg/m ² | Surface density between 2.8 and 3.05 kg/m ² | Surface density between 3.05 and 3.25 kg/m ² | Surface density > than 3.25 kg/m ² |
|---|---|--|---|---|
| Non hazardous waste to landfilling | 1,88E-04 | 1,88E-04 | 2,48E-02 | 0,00E+00 |
| Hazardous waste to incineration | 2,05E-03 | 2,05E-03 | 0,00E+00 | 1,42E-02 |
| Non hazardous waste to incineration | 6,48E-03 | 6,48E-03 | 0,00E+00 | 2,99E-02 |
| Post-manufacturing internal recycling | 4,73E-01 | 4,73E-01 | 0,00E+00 | 0,00E+00 |
| Hazardous waste to external recycling | 1,34E-03 | 1,34E-03 | 4,86E-02 | 0,00E+00 |
| Non hazardous waste to external recycling | 6,26E-02 | 6,26E-02 | 8,63E-01 | 2,03E-02 |
| Hazardous waste-water to external treatment | 1,39E-02 | 1,39E-02 | 2,88E-01 | 0,00E+00 |
| Non hazardous waste-water to external treatment | 3,77E-05 | 3,77E-05 | 0,00E+00 | 0,00E+00 |

NB: Post manufacturing recycling concerns the recycling of the losses inside the plant production. Therefore, there is no end-of-life impact on losses (excepted the recycling preparation)

Health, safety and environmental aspects during production

Tapiflex productions sites comply with the ISO 14001 Environmental Management System and the ISO 9001 Quality Management System.

Packaging

| Type | Surface density < 2.8 kg/m ² | Surface density between 2.8 and 3.05 kg/m ² | Surface density between 3.05 and 3.25 kg/m ² | Surface density > than 3.25 kg/m ² |
|--|---|--|---|---|
| PP Packaging (kg/m ²) | 1,14E-03 | 1,14E-03 | 4,20E-06 | 0,00E+00 |
| PEHD Packaging (kg/m ²) | 0,00E+00 | 0,00E+00 | 2,61E-02 | 1,00E-03 |
| Cardboard Packaging (kg/m ²) | 6,20E-02 | 6,20E-02 | 5,44E-02 | 5,00E-02 |
| PELD Packaging (kg/m ²) | 9,50E-03 | 9,50E-03 | 0,00E+00 | 5,50E-03 |
| Paper Packaging (kg/m ²) | 0,00E+00 | 0,00E+00 | 3,48E-03 | 0,00E+00 |

Delivery and installation

Delivery

The average distribution distance between the factories and the installation site is presented in the following table. It has been calculated considering the average distance between European countries where Tarkett is selling products and factories. The distribution is made by truck.

| | Surface density < 2.8 kg/m ² | Surface density between 2.8 and 3.05 kg/m ² | Surface density between 3.05 and 3.25 kg/m ² | Surface density > than 3.25 kg/m ² |
|-----------------------------------|---|--|---|---|
| Average distance of delivery [km] | 7.01E+02 | 7.01E+02 | 8.00E+02 | 5.03E+02 |

Installation

The different parts of the flooring are cut to fit the surface to fit the surface to be covered and they are arranged together so that they can fit perfectly between them on the floor .The different parts of the flooring are glued on the subfloor then they are welded together.

| Description | Amount | Unit |
|------------------------------|----------|--------------------|
| Electricity consumption | 3.35E-02 | kWh/m ² |
| Acrylic adhesive consumption | 2.50E-01 | kg/m ² |

Waste

During the installation approximately 10% of the flooring is lost as off-cuts. All flooring losses are sent to recycling.

Packaging

50 % of the packaging materials goes to incineration and 50 % goes to landfill.

Use Stage

Reference Service Life (RSL)

For this product, the stated RSL is 1 year. It should be noted, however, that the service life of a heterogeneous poly (vinyl chloride) flooring on foam may vary depending on the amount and nature of floor traffic and the type and frequency of maintenance. The manufacturer has provided this service life on the basis of his experience of flooring manufacture and supply. This RSL is applicable as long as the product use complies with that defined by ISO 14041 and ISO 10874 in accordance with the product's classification. The service lifetime recommended by Tarkett is 20 years.

Cleaning and maintenance

The maintenance step concerns the cleaning of the floor. Tarkett has provided the recommended maintenance routine for the product throughout the reference life. Water, detergent and electricity consumption of the cleaning machine are considered in the LCA study:

- Common maintenance : 2 time / week
- Periodical maintenance: 2 time / year

| Description | Amount | Unit |
|-------------------------|----------|-------------------------|
| Electricity consumption | 2.40E-01 | kWh/year/m ² |
| Water consumption | 7.00E+00 | L/year/m ² |
| Detergent consumption | 9.00E-02 | L/year/m ² |

Prevention of structural damage

To avoid excessive wear, usage should be restricted to the stated areas of application as outlined by the norm ISO 10874.

End of Life

For the purpose of this LCA, it has been assumed that 100% of the product is sent to landfill at the end of its useful life. The transport between construction site and landfill facility is by truck, with an estimated distance of 30 km (according to the FDP01-015).



Data Validation

To validate data, a validity framework has been established. A specific average product has been determined for each category. These four average products are formed by every elements of LCI. Based on results on all environmental indicators, it has been shown that these average products are representative of, respectively, one, two, two and one product(s) each. Because there is only one product in two categories (surface density inferior than 2.8 kg/m² and surface density higher than 3.25 kg/m²), impacts of their representative product are the same as theirs. So, following figures do not show them. These are data from these average products which are presented in this EPD.

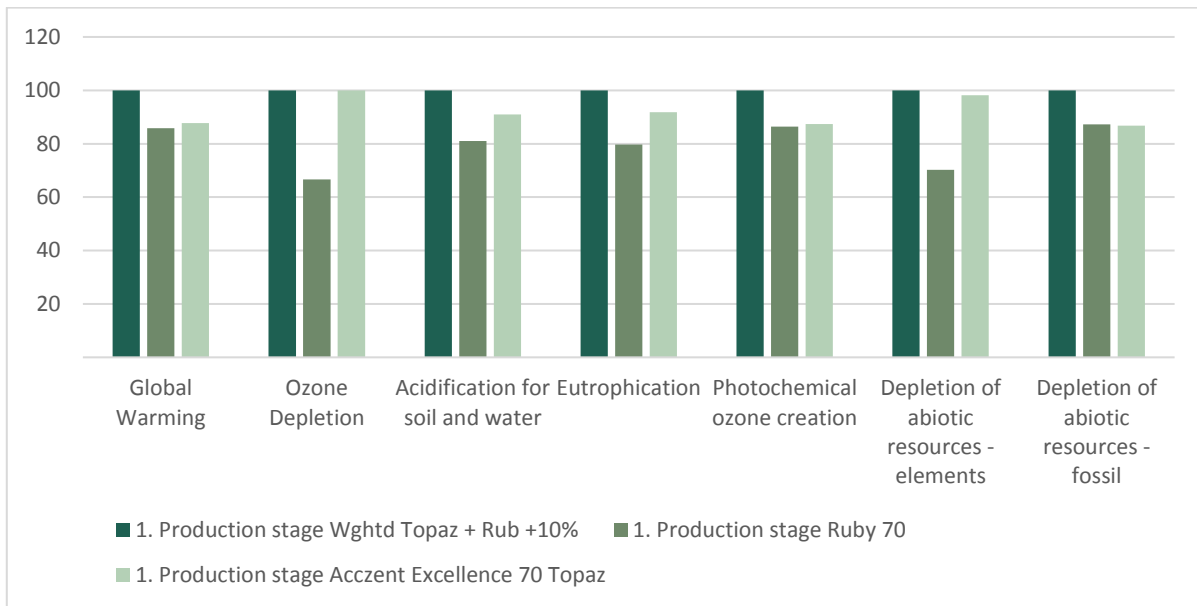


Figure 1: Comparison between Acccent Excellence 70 Topaz, Ruby 70 and the average one (surface density between 2.8 and 3.05 kg/m²)

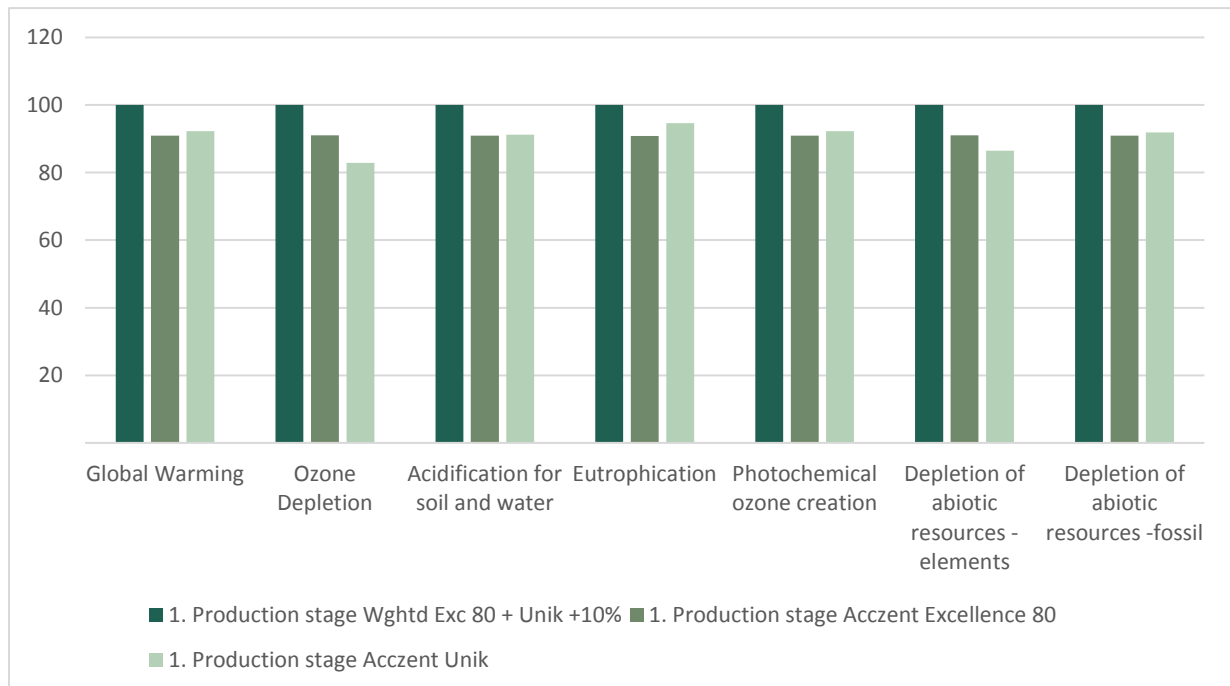


Figure 2: Comparison between Acccent Excellence 80, Acccent Unik and the average one (surface density between 3.05 and 3.25 kg/m²)

Environmental performance

Potential environmental impact

Representative product for products with a surface density < 2.8 kg/m² (Acczent Classic 40)

| PARAMETER | UNIT | Product stage | Construction stage | | | Use stage | | | | | | End of life stage | | | |
|---|------------------------|------------------|--------------------|--------------|-----|-------------|--------|-------------|---------------|------------------------|-----------------------|-------------------|-----------|------------------|----------|
| | | Total Production | Transport | installation | Use | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | Deconstruction | Transport | Waste processing | Disposal |
| | | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 |
| Global Warming | kg CO ₂ eq | 5,29E+00 | 1,11E-01 | 1,23E+00 | MND | 3,55E-01 | MND | MND | MND | MND | MND | 0,00E+00 | 1,17E-02 | 0,00E+00 | 1,48E-01 |
| Ozone Depletion | kg CFC-11 eq | 1,56E-06 | 2,07E-08 | 2,25E-07 | MND | 2,65E-08 | MND | MND | MND | MND | MND | 0,00E+00 | 2,18E-09 | 0,00E+00 | 6,22E-09 |
| Acidification of soil and water | kg SO ₂ eq. | 2,18E-02 | 3,53E-04 | 9,66E-03 | MND | 1,47E-03 | MND | MND | MND | MND | MND | 0,00E+00 | 3,74E-05 | 0,00E+00 | 1,38E-04 |
| Eutrophication | kg PO ₄ -eq | 3,96E-03 | 5,83E-05 | 8,76E-04 | MND | 8,54E-04 | MND | MND | MND | MND | MND | 0,00E+00 | 6,20E-06 | 0,00E+00 | 5,14E-05 |
| Photochemical ozone creation | kg ethylene | 4,63E-03 | 5,74E-05 | 1,08E-03 | MND | 2,01E-04 | MND | MND | MND | MND | MND | 0,00E+00 | 6,07E-06 | 0,00E+00 | 4,62E-05 |
| Depletion of abiotic resources - elements | kg antimony | 7,58E-05 | 3,46E-07 | 1,36E-05 | MND | 8,80E-07 | MND | MND | MND | MND | MND | 0,00E+00 | 3,64E-08 | 0,00E+00 | 3,06E-08 |
| Depletion of abiotic resources - fossil | MJ. net CV | 8,87E+01 | 1,68E+00 | 1,90E+01 | MND | 2,35E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 1,76E-01 | 0,00E+00 | 5,33E-01 |



Representative product for products with a surface density between 2.8 and 3.05 kg/m² (Acczent Excellence 70 Topaz, Ruby 70)

| PARAMETER | UNIT | Product stage | Construction stage | | | Use stage | | | | | | End of life stage | | | |
|---|------------------------|------------------|--------------------|--------------|-----|-------------|--------|-------------|---------------|------------------------|-----------------------|-------------------|-----------|------------------|----------|
| | | Total Production | Transport | installation | Use | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | De-construction | Transport | Waste processing | Disposal |
| | | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 |
| Global Warming | kg CO ₂ eq | 6,83E+00 | 1,51E-01 | 1,39E+00 | MND | 3,55E-01 | MND | MND | MND | MND | MND | 0,00E+00 | 1,56E-02 | 0,00E+00 | 1,97E-01 |
| Ozone Depletion | kg CFC-11 eq | 1,67E-06 | 2,80E-08 | 2,36E-07 | MND | 2,65E-08 | MND | MND | MND | MND | MND | 0,00E+00 | 2,89E-09 | 0,00E+00 | 8,27E-09 |
| Acidification of soil and water | kg SO ₂ eq. | 2,71E-02 | 4,79E-04 | 1,02E-02 | MND | 1,47E-03 | MND | MND | MND | MND | MND | 0,00E+00 | 4,97E-05 | 0,00E+00 | 1,83E-04 |
| Eutrophication | kg PO ₄ -eq | 4,99E-03 | 7,91E-05 | 9,81E-04 | MND | 8,54E-04 | MND | MND | MND | MND | MND | 0,00E+00 | 8,24E-06 | 0,00E+00 | 6,83E-05 |
| Photochemical ozone creation | kg ethylene | 6,32E-03 | 7,80E-05 | 1,25E-03 | MND | 2,01E-04 | MND | MND | MND | MND | MND | 0,00E+00 | 8,07E-06 | 0,00E+00 | 6,14E-05 |
| Depletion of abiotic resources - elements | kg antimony | 8,79E-05 | 4,70E-07 | 1,48E-05 | MND | 8,80E-07 | MND | MND | MND | MND | MND | 0,00E+00 | 4,84E-08 | 0,00E+00 | 4,06E-08 |
| Depletion of abiotic resources - fossil | MJ. net CV | 1,19E+02 | 2,27E+00 | 2,22E+01 | MND | 2,35E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 2,35E-01 | 0,00E+00 | 7,09E-01 |



Representative product for products with a surface density between 3.05 and 3.25 kg/m² (Acczent Excellence 80 and Acczent Unik)

| PARAMETER | UNIT | Product stage | Construction stage | | | Use stage | | | | | | End of life stage | | | |
|---|------------------------|------------------|--------------------|--------------|-----|-------------|--------|-------------|---------------|------------------------|-----------------------|-------------------|-----------|------------------|----------|
| | | Total Production | Transport | installation | Use | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | De-construction | Transport | Waste processing | Disposal |
| | | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 |
| Global Warming | kg CO ₂ eq | 8,78E+00 | 1,82E-01 | 1,60E+00 | MND | 3,55E-01 | MND | MND | MND | MND | MND | 0,00E+00 | 1,63E-02 | 0,00E+00 | 2,07E-01 |
| Ozone Depletion | kg CFC-11 eq | 2,09E-06 | 3,38E-08 | 2,78E-07 | MND | 2,65E-08 | MND | MND | MND | MND | MND | 0,00E+00 | 3,04E-09 | 0,00E+00 | 8,68E-09 |
| Acidification of soil and water | kg SO ₂ eq. | 3,37E-02 | 5,77E-04 | 1,09E-02 | MND | 1,47E-03 | MND | MND | MND | MND | MND | 0,00E+00 | 5,21E-05 | 0,00E+00 | 1,92E-04 |
| Eutrophication | kg PO ₄ -eq | 5,82E-03 | 9,53E-05 | 1,07E-03 | MND | 8,54E-04 | MND | MND | MND | MND | MND | 0,00E+00 | 8,65E-06 | 0,00E+00 | 7,17E-05 |
| Photochemical ozone creation | kg ethylene | 7,25E-03 | 9,39E-05 | 1,35E-03 | MND | 2,01E-04 | MND | MND | MND | MND | MND | 0,00E+00 | 8,48E-06 | 0,00E+00 | 6,45E-05 |
| Depletion of abiotic resources - elements | kg antimony | 1,10E-04 | 5,66E-07 | 1,70E-05 | MND | 8,80E-07 | MND | MND | MND | MND | MND | 0,00E+00 | 5,08E-08 | 0,00E+00 | 4,27E-08 |
| Depletion of abiotic resources - fossil | MJ. net CV | 1,37E+02 | 2,74E+00 | 2,40E+01 | MND | 2,35E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 2,46E-01 | 0,00E+00 | 7,44E-01 |



Representative product for products with a surface density superior than 3.25 kg/m² (Acczent Platinum 100)

| PARAMETER | UNIT | Product stage | Construction stage | | | Use stage | | | | | | End of life stage | | | |
|---|------------------------|------------------|--------------------|--------------|-----|-------------|--------|-------------|---------------|------------------------|-----------------------|-------------------|-----------|------------------|----------|
| | | Total Production | Transport | installation | Use | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | De-construction | Transport | Waste processing | Disposal |
| | | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 |
| Global Warming | kg CO ₂ eq | 9,37E+00 | 1,19E-01 | 1,63E+00 | MND | 3,55E-01 | MND | MND | MND | MND | MND | 0,00E+00 | 1,71E-02 | 0,00E+00 | 2,16E-01 |
| Ozone Depletion | kg CFC-11 eq | 3,16E-07 | 2,21E-08 | 9,95E-08 | MND | 2,65E-08 | MND | MND | MND | MND | MND | 0,00E+00 | 3,17E-09 | 0,00E+00 | 9,07E-09 |
| Acidification of soil and water | kg SO ₂ eq. | 3,08E-02 | 3,77E-04 | 1,05E-02 | MND | 1,47E-03 | MND | MND | MND | MND | MND | 0,00E+00 | 5,45E-05 | 0,00E+00 | 2,01E-04 |
| Eutrophication | kg PO ₄ -eq | 6,33E-03 | 6,23E-05 | 1,09E-03 | MND | 8,54E-04 | MND | MND | MND | MND | MND | 0,00E+00 | 9,04E-06 | 0,00E+00 | 7,49E-05 |
| Photochemical ozone creation | kg ethylene | 8,59E-03 | 6,14E-05 | 1,47E-03 | MND | 2,01E-04 | MND | MND | MND | MND | MND | 0,00E+00 | 8,86E-06 | 0,00E+00 | 6,74E-05 |
| Depletion of abiotic resources - elements | kg antimony | 3,29E-05 | 3,70E-07 | 9,34E-06 | MND | 8,80E-07 | MND | MND | MND | MND | MND | 0,00E+00 | 5,31E-08 | 0,00E+00 | 4,46E-08 |
| Depletion of abiotic resources - fossil | MJ. net CV | 1,61E+02 | 1,79E+00 | 2,63E+01 | MND | 2,35E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 2,57E-01 | 0,00E+00 | 7,78E-01 |



Use of resources

Representative product for products with a surface density < 2.8 kg/m² (Accent Classic 40)

| PARAMETER | UNIT | Product stage | Construction stage | | | Use stage | | | | | | End of life stage | | | |
|---|------------|------------------|--------------------|--------------|-----|-------------|--------|-------------|---------------|------------------------|-----------------------|-------------------|-----------|------------------|----------|
| | | Total Production | Transport | Installation | Use | Maintenance | Repair | Replacement | refurbishment | Operational energy use | Operational water use | De-constructi on | Transport | Waste processing | Disposal |
| | | A1-A3 | A4 | A5 | B1 | B2. | B3 | B4 | B5 | B6 | B7 | C1 | C2. | C3 | C4 |
| Renewable primary energy excl. RM | MJ. net CV | 7,33E+00 | 2,50E-02 | 1,63E+00 | MND | 8,01E-01 | MND | MND | MND | MND | MND | 0,00E+00 | 2,63E-03 | 0,00E+00 | 1,70E-02 |
| Renewable primary energy used as RM | MJ. net CV | 1,09E+00 | 0,00E+00 | 1,09E-01 | MND | 1,41E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Total renewable primary energy | MJ. net CV | 8,43E+00 | 2,50E-02 | 1,73E+00 | MND | 2,21E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 2,63E-03 | 0,00E+00 | 1,70E-02 |
| Non renewable primary energy excl. RM | MJ. net CV | 7,67E+01 | 1,72E+00 | 1,14E+01 | MND | 3,67E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 1,81E-01 | 0,00E+00 | 5,70E-01 |
| Non renewable primary energy used as RM | MJ. net CV | 3,17E+01 | 0,00E+00 | 1,10E+01 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Total non renewable primary energy | MJ. net CV | 1,08E+02 | 1,71E+00 | 2,24E+01 | MND | 3,67E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 1,81E-01 | 0,00E+00 | 5,70E-01 |
| Use of secondary material | kg | 0,00E+00 | 0,00E+00 | 0,00E+00 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Use of renewable secondary fuels | MJ. net CV | 0,00E+00 | 0,00E+00 | 0,00E+00 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Use of non renewable secondary fuels | MJ. net CV | 0,00E+00 | 0,00E+00 | 0,00E+00 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Net use of fresh water | m3 | 2,44E-01 | 3,22E-04 | 4,06E-02 | MND | 1,42E-02 | MND | MND | MND | MND | MND | 0,00E+00 | 3,39E-05 | 0,00E+00 | 6,75E-04 |



Representative product for products with a surface density between 2.8 and 3.05 kg/m² (Acczent Excellence 70 Topaz, Ruby 70)

| PARAMETER | UNIT | Product stage | Construction stage | | Use stage | | | | | | | End of life stage | | | |
|---|------------|------------------|--------------------|--------------|-----------|-------------|--------|-------------|---------------|------------------------|-----------------------|-------------------|-----------|-------------------|----------|
| | | Total Production | Transport | Installation | Use | Maintenance | Repair | Replacement | refurbishment | Operational energy use | Operational water use | De-constructi on | Transport | Waste processi ng | Disposal |
| | | A1-A3 | A4 | A5 | B1 | B2. | B3 | B4 | B5 | B6 | B7 | C1 | C2. | C3 | C4 |
| Renewable primary energy excl. RM | MJ. net CV | 9,83E+00 | 3,39E-02 | 1,88E+00 | MND | 8,01E-01 | MND | MND | MND | MND | MND | 0,00E+00 | 3,49E-03 | 0,00E+00 | 2,26E-02 |
| Renewable primary energy used as RM | MJ. net CV | 1,26E+00 | 0,00E+00 | 1,26E-01 | MND | 1,41E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Total renewable primary energy | MJ. net CV | 1,11E+01 | 3,39E-02 | 2,00E+00 | MND | 2,21E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 3,49E-03 | 0,00E+00 | 2,26E-02 |
| Non renewable primary energy excl. RM | MJ. net CV | 1,03E+02 | 2,33E+00 | 1,41E+01 | MND | 3,67E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 2,40E-01 | 0,00E+00 | 7,58E-01 |
| Non renewable primary energy used as RM | MJ. net CV | 4,29E+01 | 0,00E+00 | 1,22E+01 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Total non renewable primary energy | MJ. net CV | 1,46E+02 | 2,33E+00 | 2,62E+01 | MND | 3,67E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 2,40E-01 | 0,00E+00 | 7,58E-01 |
| Use of secondary material | kg | 0,00E+00 | 0,00E+00 | 0,00E+00 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Use of renewable secondary fuels | MJ. net CV | 0,00E+00 | 0,00E+00 | 0,00E+00 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Use of non renewable secondary fuels | MJ. net CV | 0,00E+00 | 0,00E+00 | 0,00E+00 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Net use of fresh water | m3 | 3,52E-01 | 4,37E-04 | 5,14E-02 | MND | 1,42E-02 | MND | MND | MND | MND | MND | 0,00E+00 | 4,51E-05 | 0,00E+00 | 8,97E-04 |



Representative product for products with a surface density between 3.05 and 3.25 kg/m² (Acczent Excellence 80 and Acczent Unik)

| PARAMETER | UNIT | Product stage | Construction stage | | Use stage | | | | | | | End of life stage | | | |
|---|------------|------------------|--------------------|--------------|-----------|-------------|--------|-------------|---------------|------------------------|-----------------------|-------------------|-----------|------------------|-----------|
| | | Total Production | Transport | Installation | Use | Maintenance | Repair | Replacement | refurbishment | Operational energy use | Operational water use | De-constructi on | Transport | Waste processing | Dispos al |
| | | A1-A3 | A4 | A5 | B1 | B2. | B3 | B4 | B5 | B6 | B7 | C1 | C2. | C3 | C4 |
| Renewable primary energy excl. RM | MJ. net CV | 1,06E+01 | 4,08E-02 | 1,95E+00 | MND | 8,01E-01 | MND | MND | MND | MND | MND | 0,00E+00 | 3,67E-03 | 0,00E+00 | 2,37E-02 |
| Renewable primary energy used as RM | MJ. net CV | 1,60E+00 | 0,00E+00 | 1,60E-01 | MND | 1,41E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Total renewable primary energy | MJ. net CV | 1,22E+01 | 4,08E-02 | 2,11E+00 | MND | 2,21E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 3,67E-03 | 0,00E+00 | 2,37E-02 |
| Non renewable primary energy excl. RM | MJ. net CV | 1,41E+02 | 2,80E+00 | 1,79E+01 | MND | 3,67E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 2,52E-01 | 0,00E+00 | 7,96E-01 |
| Non renewable primary energy used as RM | MJ. net CV | 4,58E+01 | 0,00E+00 | 1,25E+01 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Total non renewable primary energy | MJ. net CV | 1,87E+02 | 2,80E+00 | 3,03E+01 | MND | 3,67E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 2,52E-01 | 0,00E+00 | 7,96E-01 |
| Use of secondary material | kg | 0,00E+00 | 0,00E+00 | 0,00E+00 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Use of renewable secondary fuels | MJ. net CV | 0,00E+00 | 0,00E+00 | 0,00E+00 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Use of non renewable secondary fuels | MJ. net CV | 0,00E+00 | 0,00E+00 | 0,00E+00 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Net use of fresh water | m3 | 4,00E-01 | 5,27E-04 | 5,63E-02 | MND | 1,42E-02 | MND | MND | MND | MND | MND | 0,00E+00 | 4,74E-05 | 0,00E+00 | 9,42E-04 |



Representative product for products with a surface density superior than 3.25 kg/m² (Acczent Platinum 100)

| PARAMETER | UNIT | Product stage | Construction stage | | Use stage | | | | | | | End of life stage | | | |
|---|------------|------------------|--------------------|--------------|-----------|-------------|--------|-------------|---------------|------------------------|-----------------------|-------------------|-----------|------------------|-----------|
| | | Total Production | Transport | Installation | Use | Maintenance | Repair | Replacement | refurbishment | Operational energy use | Operational water use | De-constructi on | Transport | Waste processing | Dispos al |
| | | A1-A3 | A4 | A5 | B1 | B2. | B3 | B4 | B5 | B6 | B7 | C1 | C2. | C3 | C4 |
| Renewable primary energy excl. RM | MJ. net CV | 1,49E+01 | 2,67E-02 | 2,38E+00 | MND | 8,01E-01 | MND | MND | MND | MND | MND | 0,00E+00 | 3,83E-03 | 0,00E+00 | 2,48E-02 |
| Renewable primary energy used as RM | MJ. net CV | 1,82E+00 | 0,00E+00 | 1,82E-01 | MND | 1,41E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Total renewable primary energy | MJ. net CV | 1,67E+01 | 2,67E-02 | 2,56E+00 | MND | 2,21E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 3,83E-03 | 0,00E+00 | 2,48E-02 |
| Non renewable primary energy excl. RM | MJ. net CV | 1,32E+02 | 1,83E+00 | 1,69E+01 | MND | 3,67E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 2,63E-01 | 0,00E+00 | 8,31E-01 |
| Non renewable primary energy used as RM | MJ. net CV | 5,99E+01 | 0,00E+00 | 1,39E+01 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Total non renewable primary energy | MJ. net CV | 1,92E+02 | 1,83E+00 | 3,07E+01 | MND | 3,67E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 2,63E-01 | 0,00E+00 | 8,31E-01 |
| Use of secondary material | kg | 0,00E+00 | 0,00E+00 | 0,00E+00 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Use of renewable secondary fuels | MJ. net CV | 0,00E+00 | 0,00E+00 | 0,00E+00 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Use of non renewable secondary fuels | MJ. net CV | 0,00E+00 | 0,00E+00 | 0,00E+00 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Net use of fresh water | m3 | 4,67E-01 | 3,45E-04 | 6,29E-02 | MND | 1,42E-02 | MND | MND | MND | MND | MND | 0,00E+00 | 4,95E-05 | 0,00E+00 | 9,84E-04 |



Waste production and output flows

| Representative product for products with a surface density < 2.8 kg/m ² (Acczent Classic 40) | | | | | | | | | | | | | | | |
|---|------|------------------|--------------------|--------------|-----------|-------------|--------|-------------|---------------|------------------------|-----------------------|-------------------|-----------|-------------------|----------|
| PARAMETER | UNIT | Product stage | Construction stage | | Use stage | | | | | | | End of life stage | | | |
| | | Total Production | Transport | Installation | Use | Maintenance | Repair | Replacement | refurbishment | Operational energy use | Operational water use | De-constructi on | Transport | Waste processi ng | Disposal |
| | | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 |
| Hazardous waste disposed | kg | 1,55E-01 | 1,01E-03 | 1,11E-01 | MND | 1,78E-02 | MND | MND | MND | MND | MND | 0,00E+00 | 1,07E-04 | 0,00E+00 | 4,93E-04 |
| Non hazardous waste disposed | kg | 1,04E+00 | 8,94E-02 | 6,13E-01 | MND | 9,75E-02 | MND | MND | MND | MND | MND | 0,00E+00 | 9,40E-03 | 0,00E+00 | 2,40E+00 |
| Radioactive waste disposed | kg | 1,47E-04 | 1,18E-05 | 5,39E-05 | MND | 1,93E-05 | MND | MND | MND | MND | MND | 0,00E+00 | 1,24E-06 | 0,00E+00 | 3,78E-06 |
| Components for re-use | kg | 0,00E+00 | 0,00E+00 | 0,00E+00 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Materials for recycling | kg | 6,26E-02 | 0,00E+00 | 1,06E-01 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Materials for energy recovery | kg | 0,00E+00 | 0,00E+00 | 0,00E+00 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Exported energy (electricity) | MJ | 0,00E+00 | 0,00E+00 | 0,00E+00 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Exported energy (steam) | MJ | 0,00E+00 | 0,00E+00 | 0,00E+00 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |

MND: Module not declared



Representative product for products with a surface density between 2.8 and 3.05 kg/m² (Acczent Excellence 70 Topaz, Ruby 70)

| PARAMETER | UNIT | Product stage | Construction stage | | Use stage | | | | | | | End of life stage | | | |
|-------------------------------|------|------------------|--------------------|--------------|-----------|-------------|--------|-------------|---------------|------------------------|-----------------------|-------------------|-----------|-------------------|----------|
| | | Total Production | Transport | Installation | Use | Maintenance | Repair | Replacement | refurbishment | Operational energy use | Operational water use | De-constructi on | Transport | Waste processi ng | Disposal |
| | | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 |
| Hazardous waste disposed | kg | 1,95E-01 | 1,37E-03 | 1,15E-01 | MND | 1,78E-02 | MND | MND | MND | MND | MND | 0,00E+00 | 1,42E-04 | 0,00E+00 | 6,56E-04 |
| Non hazardous waste disposed | kg | 1,28E+00 | 1,21E-01 | 6,41E-01 | MND | 9,75E-02 | MND | MND | MND | MND | MND | 0,00E+00 | 1,25E-02 | 0,00E+00 | 3,20E+00 |
| Radioactive waste disposed | kg | 1,73E-04 | 1,60E-05 | 5,70E-05 | MND | 1,93E-05 | MND | MND | MND | MND | MND | 0,00E+00 | 1,65E-06 | 0,00E+00 | 5,03E-06 |
| Components for re-use | kg | 0,00E+00 | 0,00E+00 | 0,00E+00 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Materials for recycling | kg | 6,26E-02 | 0,00E+00 | 1,06E-01 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Materials for energy recovery | kg | 0,00E+00 | 0,00E+00 | 0,00E+00 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Exported energy (electricity) | MJ | 0,00E+00 | 0,00E+00 | 0,00E+00 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Exported energy (steam) | MJ | 0,00E+00 | 0,00E+00 | 0,00E+00 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |

MND: Module not declared



Representative product for products with a surface density between 3.05 and 3.25 kg/m² (Acczent Excellence 80 and Acczent Unik)

| PARAMETER | UNIT | Product stage | Construction stage | | Use stage | | | | | | | End of life stage | | | |
|-------------------------------|------|------------------|--------------------|--------------|-----------|-------------|--------|-------------|---------------|------------------------|-----------------------|-------------------|-----------|-------------------|----------|
| | | Total Production | Transport | Installation | Use | Maintenance | Repair | Replacement | refurbishment | Operational energy use | Operational water use | De-constructi on | Transport | Waste processi ng | Disposal |
| | | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 |
| Hazardous waste disposed | kg | 3,22E-01 | 1,66E-03 | 1,29E-01 | MND | 1,78E-02 | MND | MND | MND | MND | MND | 0,00E+00 | 1,49E-04 | 0,00E+00 | 6,89E-04 |
| Non hazardous waste disposed | kg | 1,16E+00 | 1,46E-01 | 6,36E-01 | MND | 9,75E-02 | MND | MND | MND | MND | MND | 0,00E+00 | 1,31E-02 | 0,00E+00 | 3,36E+00 |
| Radioactive waste disposed | kg | 4,49E-04 | 1,93E-05 | 8,49E-05 | MND | 1,93E-05 | MND | MND | MND | MND | MND | 0,00E+00 | 1,73E-06 | 0,00E+00 | 5,28E-06 |
| Components for re-use | kg | 0,00E+00 | 0,00E+00 | 0,00E+00 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Materials for recycling | kg | 8,63E-01 | 0,00E+00 | 1,86E-01 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Materials for energy recovery | kg | 0,00E+00 | 0,00E+00 | 0,00E+00 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Exported energy (electricity) | MJ | 0,00E+00 | 0,00E+00 | 0,00E+00 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Exported energy (steam) | MJ | 0,00E+00 | 0,00E+00 | 0,00E+00 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |

MND: Module not declared



Representative product for products with a surface density superior than 3.25 kg/m² (Acczent Platinum 100)

| PARAMETER | UNIT | Product stage | Construction stage | | Use stage | | | | | | | End of life stage | | | |
|-------------------------------|------|------------------|--------------------|--------------|-----------|-------------|--------|-------------|---------------|------------------------|-----------------------|-------------------|-----------|-------------------|----------|
| | | Total Production | Transport | Installation | Use | Maintenance | Repair | Replacement | refurbishment | Operational energy use | Operational water use | De-constructi on | Transport | Waste processi ng | Disposal |
| | | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 |
| Hazardous waste disposed | kg | 2,43E-01 | 1,08E-03 | 1,19E-01 | MND | 1,78E-02 | MND | MND | MND | MND | MND | 0,00E+00 | 1,55E-04 | 0,00E+00 | 7,19E-04 |
| Non hazardous waste disposed | kg | 1,75E+00 | 9,55E-02 | 6,53E-01 | MND | 9,75E-02 | MND | MND | MND | MND | MND | 0,00E+00 | 1,37E-02 | 0,00E+00 | 3,51E+00 |
| Radioactive waste disposed | kg | 1,51E-04 | 1,26E-05 | 5,43E-05 | MND | 1,93E-05 | MND | MND | MND | MND | MND | 0,00E+00 | 1,81E-06 | 0,00E+00 | 5,52E-06 |
| Components for re-use | kg | 0,00E+00 | 0,00E+00 | 0,00E+00 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Materials for recycling | kg | 2,03E-02 | 0,00E+00 | 1,02E-01 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Materials for energy recovery | kg | 0,00E+00 | 0,00E+00 | 0,00E+00 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Exported energy (electricity) | MJ | 0,00E+00 | 0,00E+00 | 0,00E+00 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Exported energy (steam) | MJ | 0,00E+00 | 0,00E+00 | 0,00E+00 | MND | 0,00E+00 | MND | MND | MND | MND | MND | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |

MND: Module not declared



Programme-related information and verification

The EPD owner has the sole ownership liability and responsibility for the flooring EPD. EPDs within the same product category but from different programmes may not be comparable. EPDs of floor products may not be comparable if they do not comply with EN 15804 and 16810.

| | |
|--------------------------------------|--|
| Programme: | The International EPD® System EPD International AB Box 210 60 SE-100 31 Stockholm Sweden www.environdec.com info@environdec.com |
| EPD registration number: | S-P-01348 |
| Published: | 2018-12-06 |
| Valid until: | 2023-12-01 |
| Product Category Rules: | PCR 2012:01 version 2.2 and Sub-PCR-F Resilient. textile and laminate floor coverings (EN 16810) |
| Product group classification: | UN CPC APE/NAF - 2223Z |
| Reference year for data: | 2017 |
| Geographical scope: | Europe |





| |
|---|
| CEN standard EN 15804 and EN 16810 serve as the Core Product Category Rules (PCR) |
| Product category rules (PCR): EN 15804 and EN 16810 |
| Independent third-party verification of the declaration and data. according to ISO 14025:2006: <input type="checkbox"/> EPD process certification <input checked="" type="checkbox"/> EPD verification |
| Third party verifier: Damien PRUNEL. BUREAU VERITAS LCIE |
| Procedure for follow-up of data during EPD validity involves third party verifier: <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No |

References

General Programme Instructions of the International EPD® System. Version 3.0.

PCR 2012:01 version 2.2

Contact information:

| | |
|---|---|
|  | <p>Programme operator: EPD International AB info@environdec.com</p> |
|  | <p>Author of the Life Cycle Assessment TARKETT Tarkett La Défense 1 Terrasse Bellini 92 400 Paris</p> <p>Tel +33 (0)1 41 20 40 74 Mail axel.roy@tarkett.com Web www.tarkett.com</p> |
|  | <p>Owner of the Declaration TARKETT Tarkett La Défense 1 Terrasse Bellini 92 400 Paris</p> <p>Tel +33 (0)1 41 20 40 74 Mail axel.roy@tarkett.com Web www.tarkett.com</p> |
|  | <p>Reviewer BUREAU VERITAS LCIE 170 rue de Chatagnon ZI Centr'alp 38 430 Moirans - FRANCE</p> <p>Tel +33 (0)4 76 07 36 42 Mail damien.prunel@fr.bureauveritas.com Web www.codde.fr</p> |

